


Retractable Safety Gate--SG025

IMPORTANT! READ AND FOLLOW THESE INSTRUCTIONS CAREFULLY AND KEEP FOR FUTURE REFERENCE.



Component Parts

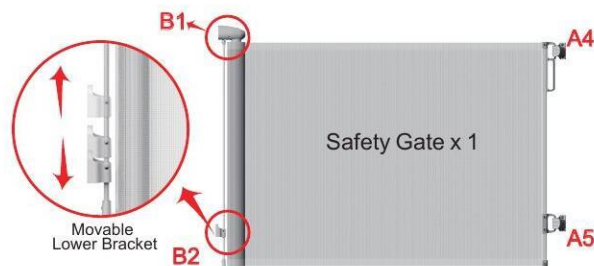

Warm Notice:

***Before installation, make sure the suitable screws for the surface.**

***Shorter Screws are used on the wood surface.**

PA4x25

Note 1: According to the hardness of wood surface, if necessary you may pre-drill holes within 2.5mm diameter before applying the Screw.

PA4x50

***Longer screws and Expansion Screws are used in solid wall such as concrete wall or tile wall which with skirt board.**

M8x40


Note 2: Please pre-drill the holes on the hardwall before use expansion tube.

PA4x25

M8x40


***Shorter screws and Expansion Screws are used in solid wall such as concrete wall or tile wall which without skirt board.**

Location Fixing Position

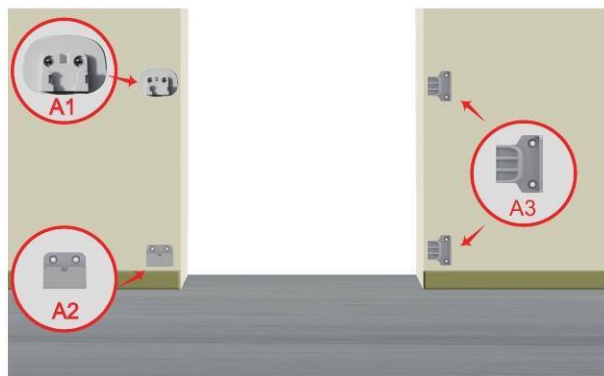


Warning

Before installation, make sure 2pcs A3 to be used on proper surface.



*** If A3 are fix on the same plane, compare to the surface of A1 & A2, screws should be mounting on the A3A holes.**
*** If A3 are fix on the intersection angle, compared to the surface of A1 & A2, screws should be mounting on the A3B holes.**

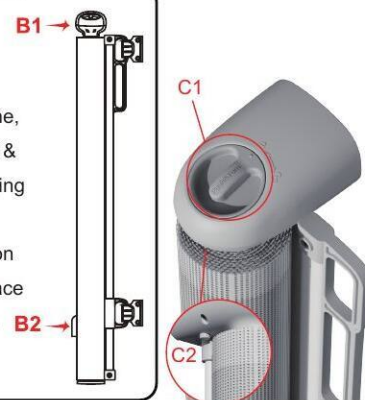


For doorways, hallways and bottom of stairs.




Stairways



Door frame



Doorways



Baseboard

Troubleshooting:


If hooking the A4&A5 into the brackets is difficult, verify the following:

- The brackets are level.
- The horizontal distances between the top brackets and the bottom brackets are equal.
- The brackets are directly vertical (plumb) of each other on each side of the doorway. For best results, use a slow and smooth motion to hook the A4&A5 to the brackets.

WARNING

- MODEL NO.: SG025
- If there is baseboard at the wall, please adjust the position of the lower bracket according to the baseboard. If there is no baseboard at the wall, please do not posit the lower bracket over 12cm from the floor.
- Safety gate is suitable for use with children from 6 months up to 24 months of age.
- To install the gate outside the door frame, a standard 140cm wide mesh gate is recommended for door opening within 110cm, recommending to reserve 30cm mesh length for safety; For example, a 180cm wide mesh gate is suitable for door opening within 150cm, while a 350cm wide mesh gate is suitable for door opening within 320cm.
- To prevent serious injury or death, securely install gate or enclosure and use according to manufacturer's instructions.
- Never leave child unattended when using this product.
- Incorrect installation can be dangerous.
- Do not use the safety gate if any components are damaged or missing.
- The safety gate must not be fitted across windows and suspended positions.
- Never use with a child able to climb over or dislodge the gate or enclosure.
- Danger to older children if climbing over the product.
- Forbid to install this product on glass doors. Install this product against reliable doors or walls.
- Forbid to install the safety gate at the top of the stairs.
- If the product is used at the bottom of stairs, in order to prevent child climbing upstairs, it should be positioned on the lowest step.
- Do not put any goods which can be grabbed by children or pets near this product to prevent injury.
- Before using this product, carefully inspect for any loose parts and whether any parts needs to be tightened.
- Make sure the product to be installed is horizontal and flat on the floor.
- Regularly check that the safety gate is properly installed and secured.
- Safety gate must be fitted between rigid surfaces such as timber or hard wall.

Installation

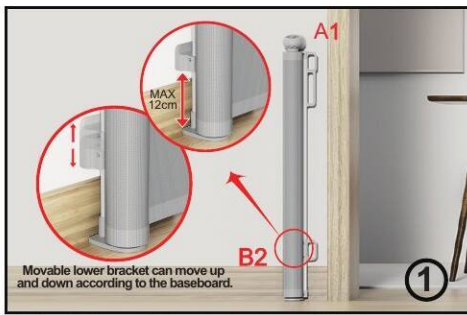

1. Apply the safety gate to the wall lightly, adjust the height of the movable lower bracket B2 suitable for the baseboard and fixed it with screw. Then Place A1&A2 into B1&B2 respectively.
(If there is no baseboard on the wall, please do not posit the lower bracket B2 over 12cm up from the floor.)




2. Clean the surface and leave to dry thoroughly, then tear off the release paper from the tapes on brackets (A1&A2), do NOT touch the adhesive, stick the safety gate on the wall.




3. Press the button C2 and lift it up then the safety gate can be removed out from A1&A2.




4. Mark the screw holes of A1&A2 and make sure A1&A2 are vertical.

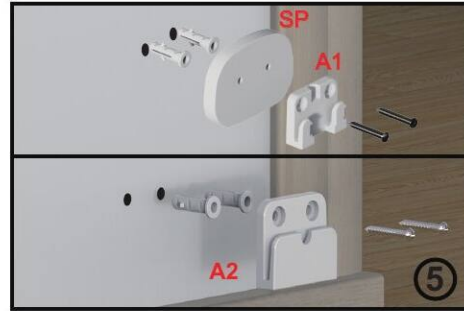


5. Remove the brackets(A1,A2) from the wall, drill the marked screw holes, insert the expansion tubes, and then use the screws to fix brackets(A1,A2) properly.

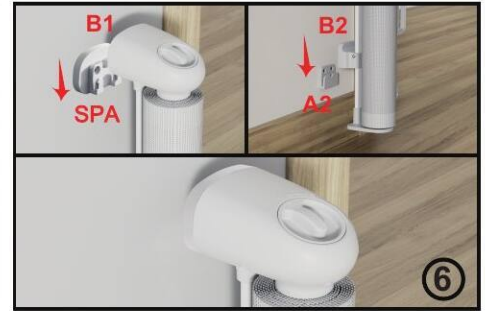

6. Place the B2 into A2, buckle B1 into A1. Make sure that A1&B1, A2&B2 is buckled into the gap well respectively.

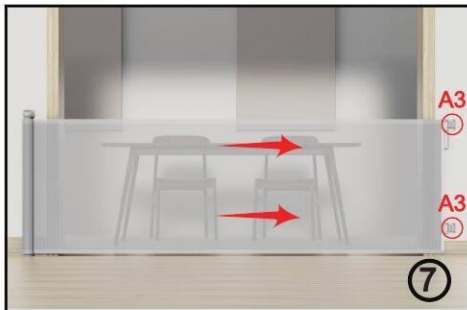

7. Open the safety gate, make sure the mesh is flat and wrinkles free. Apply A3X2 to the desired position, and mark the position of the screw holes of A3X2 accordingly. Make sure two A3 are vertical.

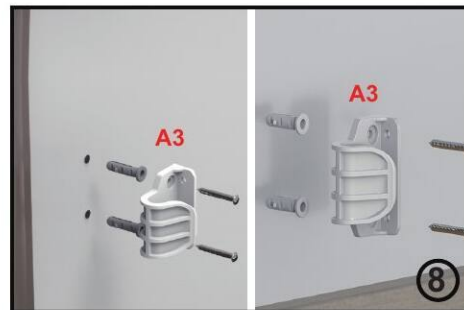

8. Remove the bracket of A3X2, drill the marked screw holes, insert the expansion tubes, and then use the screws to fix brackets(A3X2) properly.



9. Installation finished and make sure the gate is in locked position.

Take note 1 Please always put the lower bracket B2 as close to the baseboard/skirting board. (If there is no baseboard/skirting board on the wall, please do not posit the lower bracket B2 over 12cm up from the floor.)


Take note 2 Please adjust the position of A1, A2, A3X2, then pull out the mesh to check if it is balance, and make sure that the mesh is level.

Take note 3 Please pre-drill the holes on the hardwall before use expansion tube.

To Use



1. Press and turn the cap of the gate clockwise to unlock the gate.



2. Hold the handle and pull out mesh barrier, keep the mesh surface vertically flat, hook A4 & A5 to both A3 well respectively.




3. Make sure that A4 & A5 are hooked well in A3.




4. Press and turn the cap of the gate counter-clockwise to lock the gate.

To Remove The Gate From The Wall




Press C2 button, and lift it up to remove the gate easily.


Improper Installation



1. Forbid to install the safety gate at the middle of the stairs.



2. Forbid to install the safety gate at the top of the stairs.



3. Forbid to install the safety gate on the glass doors, windows and suspended positions.